



Systemtech *IPG/7000 Series*

Dial-to-IP Converters For Electronic Funds Transfer In ATM and Kiosk Applications

Introducing the perfect combination of cost savings, protection of investment, and revenue enhancement for IP-based ATM and Kiosk transactions.

Systemtech dial-to-IP converters permit ATMs and other POS payment devices to simply and efficiently re-route transactions via the Internet or private IP networks instead of dial up telephone lines.

Monthly recurring costs for phone lines may be eliminated in favor of a single, high-speed Internet or private IP connection. Costs per transaction may be lowered. Previous investments in ATMs may be maintained. Transaction times and download times may be reduced generating increased revenue and reduced costs of operation and maintenance.

Systemtech gateways are rapidly becoming the clear choice of leading payment processors, broadband suppliers, and ATM manufacturers and distributors. So contact your favorite supplier today, and accelerate your company's transition to IP-based savings!



Systemtech offers more than a dozen Dial-to-IP converters to cost-effectively address the complete range of EFT applications. ATM connections are made with RJ-11 telephone, DB-25 serial, or Ethernet interfaces.

- ❖ **ATM Dial to IP Conversion**
- ❖ **Private IP or SSL**
- ❖ **Split Dial Capability**
- ❖ **No Changes to ATM Applications**
- ❖ **SSL & 3DES Encryption**
- ❖ **POTS, Serial Port, Ethernet Interfaces**
- ❖ **Dial Back-up Option**





Systech *IPG/7000 Series*

Technical Specifications



IP Protocol Support

IP	HTTP	Telnet
TCP	DHCP/BootP	rTelnet

Security & Encryption

SSL	3DES
-----	------

Remote Management & Diagnostics

- Web-Browser Remote Interface
- Field Upgradeable Flash
- Remote & Local Diagnostics
- Pin-level Diagnostics & Remote Trace

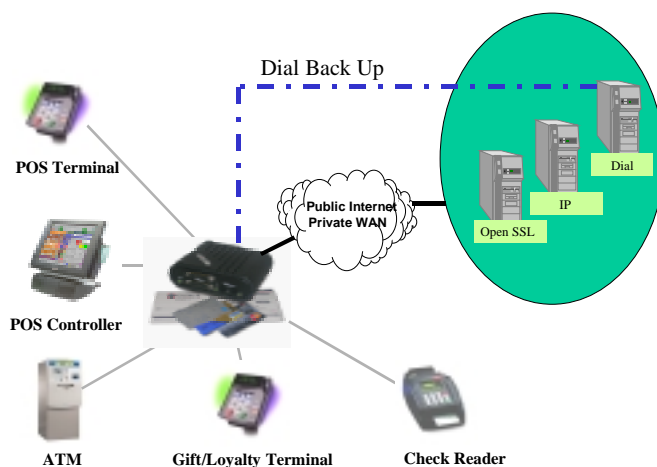
Hardware Interfaces

- 10/100 Base-T Ethernet RJ45 802.3
- RJ-11 POTS Line Interface
- DB-25 DCE/DTE Selectable Serial Interface
- Universal Locking Power Supply
- Status LED Indicators






Packaging & Environmental

- Physical 6.3 x 5.75 x 2.1 inches
- Weight 1.25 Pounds
- CD-ROM configuration and documentation
- ESD Protection
- Operating Temp 0 to 50 degrees C
- Storage Temp -10 to 70 degrees C
- Humidity 10% to 90% non-condensing

Contact Systech Sales:
1-800-800-8970
sales@systech.com



Selected Models & Configurations

	IPG-7110	1 RJ-11 Telephone Port
	IPG-7120	2 RJ-11 Telephone Ports
	IPG-7540	4 RJ-11 Telephone Ports Dial Back-Up
	IPG-7501	1 DB-25 Serial Modem Port Dial Back-Up
	IPG-7522	2 RJ-11 Telephone Ports 2 DB-25 Serial/Modem Ports Dial Back-Up

Systech designs and markets dozens of models and configurations for ATM and Kiosk applications. Ask your reseller or a Systech representative to locate the model which best serves your need.