



Systemtech *IPG/7000 Series*

Dial- to-IP Converters For Electronic Payments and More In Restaurant Applications

Introducing the perfect combination of cost savings, protection of investment, and revenue enhancement for IP-based payment transactions.

Systemtech dial-to-IP converters permit POS payment terminals, POS payment controllers, check readers and ATMs to simply and efficiently re-route transactions via the Internet or private IP networks instead of dial up telephone lines.

Monthly recurring costs for phone lines may be eliminated in favor of a single, high-speed Internet or private IP connection. Costs per transaction may be lowered. Previous investments in credit and debit terminals may be maintained. Transaction times may be dramatically reduced, eliminating costly peak period delays, and increasing revenue.


And Systemtech converters can further enhance your business by enabling new gift and loyalty programs without the need for new equipment or phone lines.

Systemtech gateways are the clear choice of leading payment processors, broadband suppliers, and restaurant integrators everywhere. So contact your favorite supplier today, and accelerate your company's transition to IP-based savings!



Systemtech Dial-to-IP converters simultaneously support diverse credit, debit, check, loyalty, and gift programs over a single broadband connection with no limitation on the number of IP-based host processors.

- ❖ **Credit / Debit / Check Transactions**
- ❖ **Gift and Loyalty Transactions**
- ❖ **Split Dial Capability**
- ❖ **No Changes to POS Applications**
- ❖ **SSL & 3DES Encryption**
- ❖ **POTS and Serial Port Interfaces**
- ❖ **Dial Back-up Option**

Dial  IP





Systech *IPG/7000 Series*

Technical Specifications



IP Protocol Support

| | | |
|-----|------------|---------|
| IP | HTTP | Telnet |
| TCP | DHCP/BootP | rTelnet |

Security & Encryption

| | |
|-----|------|
| SSL | 3DES |
|-----|------|

Remote Management & Diagnostics

- Web-Browser Remote Interface
- Field Upgradeable Flash
- Remote & Local Diagnostics
- Pin-level Diagnostics & Remote Trace

Hardware Interfaces

- 10/100 Base-T Ethernet RJ45 802.3
- RJ-11 POTS Line Interface
- DB-25 DCE/DTE Selectable Serial Interface
- Universal Locking Power Supply
- Status LED Indicators


Packaging & Environmental

- Physical 6.3 x 5.75 x 2.1 inches
- Weight 1.25 Pounds
- CD-ROM configuration and documentation
- ESD Protection
- Operating Temp 0 to 50 degrees C
- Storage Temp -10 to 70 degrees C
- Humidity 10% to 90% non-condensing

Contact Systech Sales:

1-800-800-8970

sales@systech.com

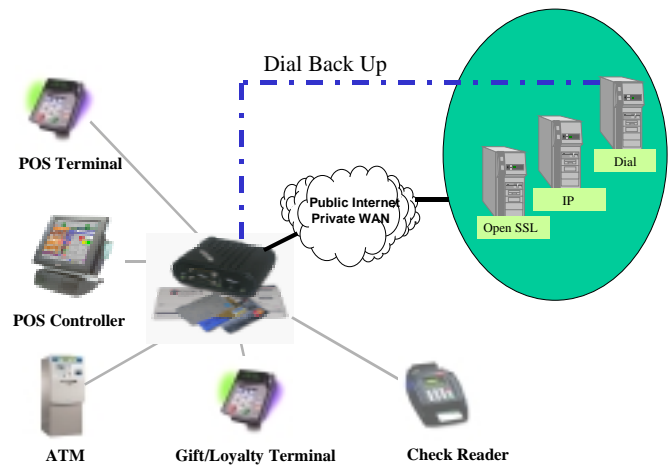

Selected Models & Configurations

| | | |
|--|-----------------|---|
| | IPG-7110 | 1 RJ-11 Telephone Port |
| | IPG-7120 | 2 RJ-11 Telephone Ports |
| | IPG-7540 | 4 RJ-11 Telephone Ports Dial Back-Up |
| | IPG-7501 | 1 DB-25 Serial Modem Port Dial Back-Up |
| | IPG-7522 | 2 RJ-11 Telephone Ports 2 DB-25 Serial/Modem Ports Dial Back-Up |

Systech designs and markets dozens of models and configurations for restaurant applications. Ask your reseller or a Systech representative to locate the model which best serves your need.